

TECHNICAL MANUAL

DUCTIMAX i

Medium available head duct units with EC motor
2-8 kW



BLDC
motor



Supervision
GARDA



2 pipes systems



4 pipes systems



Centrifugal fan

PLUS

- » Permanent magnet EC motor
- » Low electricity consumption
- » Easy setup of ventilation section
- » Heat exchanger up to 4 rows
- » Compact dimensions
- » Reversible water connections
- » Can be integrated into GARDA
- » Wide range of available accessories



Dear Customer,

Thank you for placing your trust in one of the products of Galletti S.p.a

This product is the result of our work and our commitment to design, research, and production and has been made from the finest materials, employing state-of-the-art components and production technology.

The CE marking of the product ensures its compliance with the safety requirements of the following directives: the Machinery Directive, the Electromagnetic Compatibility Directive, the Electrical Safety Directive, and the Pressure Equipment Directive. Fulfillment of the Ecodesign requirements is fully in keeping with the environmental awareness that has always guided our company.

The company certification of the Quality and Safety management system ensures that product quality is constantly checked and improved, and that the product is manufactured in full compliance with the highest standards.

By choosing our product, you have opted for Quality, Reliability, Safety, and Sustainability.

At your disposal, once again.

Galletti S.p.a

AVAILABLE VERSIONS

DMXXDIL0...A

Units for 2 pipes systems

DMXXDILL...A

Unit for 4-pipe systems equipped with an additional 1-row exchanger for the hot water circuit

TABLE OF CONTENTS

1	MAIN FEATURES	p. 5
1.1	MODULATION AND EFFICIENCY IN A RECESS CEILING-MOUNTED UNIT	p. 5
2	MAIN COMPONENTS	p. 5
	STRUCTURE	p. 5
	EC MOTOR	p. 5
	AIR FILTER	p. 5
	HEAT EXCHANGER	p. 5
	FANS	p. 5
2.1	AIR INTAKE	p. 5
3	INSTALLATION	p. 6
3.1	INSTALLATION REQUIREMENTS	p. 6
3.2	ASSEMBLY OF UNITS	p. 7
4	AVAILABLE ACCESSORIES	p. 8
5	RATED TECHNICAL DATA	p. 9
6	WEIGHTS	p. 12
7	PERFORMANCES	p. 13
8	VENTILATION FEATURES	p. 14
9	SOUND POWER LEVELS FOR 2-PIPES OCTAVE BAND	p. 15
10	SOUND POWER LEVELS FOR OCTAVE BAND 4 PIPE SYSTEMS AND 1 ROW	p. 16
11	OVERALL DIMENSIONS	p. 17
12	ELECTRICAL CONNECTIONS	p. 19
13	ELECTRICAL WIRES	p. 20
14	ACCESSORIES	p. 23
15	MAINTENANCE	p. 26
15.1	CLEANING THE AIR FILTER	p. 26
15.2	CLEANING THE HEAT EXCHANGER	p. 26

OPERATING LIMITS

Thermal carrier fluid: **water**

Water temperature: **5 °C ÷ 80 °C**

Air temperature: **-20 °C ÷ 40 °C**

Supply voltage: **230 V +/- 10 %**

Maximum water pressure during operation: **10 bar**

Limit of room air relative humidity: **RH<85% not**

condensing

1 MAIN FEATURES

MODULATION AND EFFICIENCY IN A RECESS CEILING-MOUNTED UNIT

The range is completed by DUCTIMAX i, which uses inverter EC technology in the electric motors. To the features of DUCTIMAX it adds the benefits of brushless technology, including a reduction in electricity consumption and consequent reduction in CO₂ emissions, increase in operating flexibility thanks to the modulation of air flow and increase in the level of comfort in terms of temperature, humidity and noise levels.

The range is made up of 12 models with air flows from 300 to 1200 m³/h.

Continuous modulation of the air flow and the use of

high-efficiency heat exchangers enables operation also with small air-water temperature differences.

The heat exchangers can also be optimized in the circuit for centralized applications such as district cooling.

Operation is controlled from wall-mounted microprocessor control panels with display, such as the MYCOMFORT LARGE and EVO models which also enable DUCTIMAX i to be connected to GARDA.

The action of the G3 air filter can be combined with an air ionisation system available as an accessory.

2 MAIN COMPONENTS

STRUCTURE

Built from galvanised steel sheet, heat and sound insulated by means of Class 1 self-extinguishing panels. Reduced height to facilitate installation in a horizontal position in a false ceiling. The structure incorporates a drip tray and condensate drain outlet.

The main condensate drip tray is situated inside the structure of the unit and is at a positive pressure relative to the drain outlet to facilitate condensate drainage.

EC MOTOR

Single-phase asynchronous multi-speed electric motor with permanently connected capacitor and thermal protector, mounted

on vibration-damping supports.

AIR FILTER

Washable air filter, made of acrylic fibre, filtration class G2 or G3,

applied on the air intake; may be pulled out from below.

HEAT EXCHANGER

High efficiency 3 and 4 rows heat exchanger made with copper piping and aluminium fins blocked to pipings by mechanical expansion, provided with brass manifolds and air vent valve. The heat exchanger usually comes with water connections mounted

on the left, but it can be turned by 180°. High-efficiency heat exchangers optimized for district cooling applications are available on request.

FANS

Double suction centrifugal fans made with ABS or aluminium, with statically and dynamically balanced forward-curving

blades, directly coupled to the electric motor.

AIR INTAKE

Air intake from the front or bottom of the unit, according to system requirements. See figure 15.2 p. 27 and 15.3 p. 27.

3 INSTALLATION

⚠️ WARNING: unit installation and start-up must be entrusted to competent personnel and performed in a workmanlike manner, in accordance with current regulations.

⚠️ WARNING: Install the ducted unit, the line switch (IL) and/or all remote controls in a position out of the reach of persons who are in the bathroom or in the shower.

⚠️ DANGER: The unit may be used by children of at least 8 years of age and by persons with reduced physical, sensory, or mental capabilities, or who lack experience or the necessary knowledge, provided that they are supervised or after they have received instructions relating to the safe use of the unit and understand the inherent dangers. Children must not play with the unit. Cleaning and maintenance to be carried out by the user must not be performed by unsupervised children.

☞ WARNING: It is advisable to install any accessories on the standard unit prior to positioning the latter, making reference to the technical sheets. The air intake and outlet have a rectangular cross-section, with pre-cut holes for fastening the available accessories. To make connection using rectangular ducts it is recommended to use accessories RD or RDC, which can be fitted respectively on the intake or outlet

section.

NOTE: to install ducts on both the inlet and outlet sides, you will need 1 RD accessory (intake) and 1 RDC accessory (outlet).

☞ WARNING: If you wish to make the connections using flexible circular ducts (\varnothing 200), it will be necessary to use accessories PMA or PMAC, which can be fitted respectively on the intake or outlet section.

NOTE: to install flexible ducts (\varnothing 200), on both the inlet and outlet sides, you will need 1 PMA accessory (intake) and 1 PMAC accessory (outlet).

☞ WARNING: with MAF90 or MAFO90 is possible to have frontal air intake to better adapt it to system requirements. For installation follow the instructions in figure 15.3 p. 27.

The exchanger connections can be switched over to the opposite side by carrying out the following steps:

- remove the upper closing panel.
- remove the collecting condensate tray.
- remove the heat exchanger module by taking out the fastening screws (2 per side).
- turn the heat exchanger by 180° (on the vertical axis) and screw it back into the unit again.
- reassemble the tray and the upper closing panel.

3.1 INSTALLATION REQUIREMENTS

Some rules to follow

- Vent air from the exchanger while the pumps are off. For this purpose use the air vent valves situated next to the exchanger connections.
- All ducts, especially the outlet ducts, must be insulated with anti-condensation material.
- An inspection panel must be provided in proximity to the unit to enable maintenance and cleaning operations.
- Install the control panel on the wall; choose an accessible position from where functions may be easily set and which is suitable for taking temperature readings, where applicable. Avoid positions directly exposed to sunlight or direct currents of hot or cold air and make sure there are no obstacles which may preclude a correct temperature reading.

⚠️ WARNING:

In normal operation, particularly with the fan at minimum speed and ambient air with high relative humidity, condensation may form on the air outlet and on some external parts of the unit.

To avoid such issues while always remaining within the operating limits envisaged for the unit, it is necessary to limit the inlet temperature of the water inside the heat exchanger. In particular, the difference between the air dew point (T_{A,D_p}) and the inlet water temperature (T_w) must NOT exceed 14 °C, according to the following relationship: $T_w > T_{A,D_p} - 14$ °C

Example: in the case of ambient air at 25 °C with 75% relative humidity, the dew point temperature is about 20 °C and therefore the inlet temperature of the water in the battery must be greater than:

- 20-14 = 6 °C in order to avoid condensation on a fancoil equipped with a valve.
- 20-12 = 8 °C if the valve kit accessory can not be installed.

		Fan coil with valve						
		Air temperature dry bulb (°C)						
		21	23	25	27	29	31	33
Relative humidity %	40	5	5	5	5	5	5	5
	50	5	5	5	5	5	6	8
	60	5	5	5	5	7	9	11
	70	5	5	6	8	9	11	13
	80	5	6	8	10	12	14	16
	90	6	8	10	12	14	16	18

		Fan coil without valve						
		Air temperature dry bulb (°C)						
		21	23	25	27	29	31	33
Relative humidity %	40	6	6	6	6	6	6	6
	50	6	6	6	6	6	8	10
	60	6	6	6	7	9	11	13
	70	6	6	8	10	11	13	15
	80	6	8	10	12	12	16	18
	90	8	10	12	14	14	18	20

In the event the indoor unit is stopped for a prolonged period, with the fan stopped and circulation of cold water in the heat exchanger, condensation may also form on the unit's exterior. In this case it is advisable to install the 3-way (or 2-way) valve accessory in order to stop the flow of water in the coil when the fan is stopped.

During wintertime periods of quiescence, drain water from the system, to prevent ice from forming. If anti-freeze solutions are used, check for their freezing point using the table below.

% Glycol by weight	Freezing temperature (°C)	Capacity adjustment	Pressure drop adjustment
0	0	1,00	1,00
10	-4	0,97	1,05
20	-10	0,92	1,10
30	-16	0,87	1,15
40	-24	0,82	1,20

3.2 ASSEMBLY OF UNITS

Mounting the unit

Insert the vibration dampers provided in the 4 slots indicated for ceiling installation


Fasten the base unit to the ceiling or wall using at least 4 of the 8 slots provided.

- It is recommended to use 8MA threaded bars plus screw anchors of adequate capacity to bear the weight of the unit, and to prepare the positioning of the unit using 3 8MA bolts (2 in the lower part, 1 in the upper part as shown in figure 3.1 Fissaggio unità incasso a soffitto 1 p. 7) and two washers for each bar. Before tightening the lock nut, adjust the main nut so as to assure that the unit is properly inclined


so as to facilitate condensate drainage (figure 3.2 Condensate discharge p. 7). To obtain the proper inclination, tilt the unit so that the intake side is slightly lower (approximately 10 mm) than the outlet side. Make the plumbing connections to the heat exchanger and, where the cooling function is to be used, to the condensate drainage outlet. Use one of the two tray drain outlets, which can be seen on the outside of the unit side panels.

- To connect the unit to the drainage line, use a flexible rubber hose and secure it to the pre-selected drain pipe (\varnothing 3/8") using a metal clamp (use the drain outlet situated on the plumbing connection side).

» Ceiling installation unit

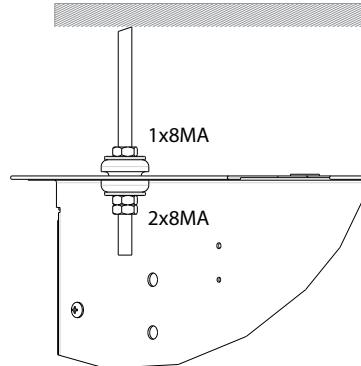

» Condensate discharge proper inclination

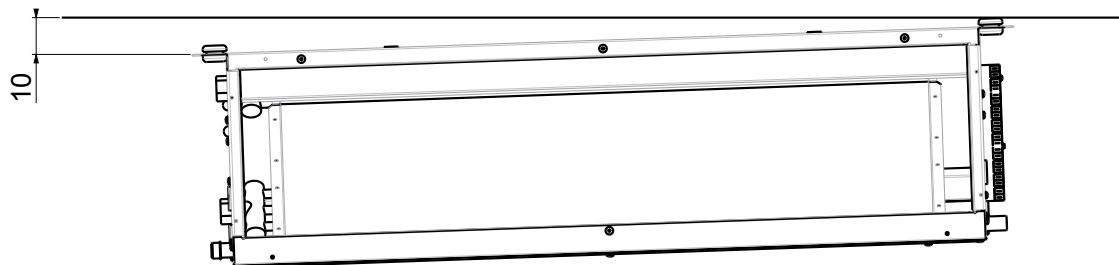

4 AVAILABLE ACCESSORIES

Electronic microprocessor control panels with display	
DIST	MY COMFORT controller spacer for wall mounting
EVOBOARD	Circuit board for EVO control
EVODISP	User interface with display for EVO controller
MCLE	Microprocessor control with display MY COMFORT LARGE
MCSUE	Humidity sensor for MY COMFORT (medium e large), EVO
MCSWE	Water sensor for MYCOMFORT and EVO controllers
Electronic microprocessor control panels	
TED 10	Electronic controller for BLDC fan equipped with inverter and ON/OFF valves 230 V
TED SWA	Water temperature sensor for TED controls
Auxiliary water drip trays, insulating shell, condensate drainage pump	
KSC	Condensate drainage pump kit
Electrical heating elements	
RE	Heating element with installation kit, relay box and safety devices
Air inlet and outlet grilles	
GA	Aluminium air intake grille, with frame
GM	Aluminium air outlet grille with 2-row fins and subframe
Valves	
V2VDF+STD	2-way valves, ON/OFF or MODULATING actuator, 230 V or 24 V power supply, hydraulic kit, for main and additional heat exchanger
V2VSTD	2-way valve, ON/OFF or MODULATING actuator, 230 V or 24 V power supply, hydraulic kit, for main heat exchanger
V3VDF	3-way valves, ON/OFF or MODULATING actuator, 230 V or 24 V power supply, hydraulic kit, for additional heat exchanger
V3VSTD	2-way valves, ON/OFF or MODULATING actuator, 230 V or 24 V power supply, hydraulic kit, for main heat exchanger
VPIC	2-way valves pressure independent, ON/OFF or MODULATING actuator, 230 V or 24 V power supply, hydraulic kit, for main heat exchanger
Plenum, air intake modules, air inlet and outlet connectors and cabinets	
MAF90	Air intake module with G3 air filter
MAFO	Air intake module with G4 air filter
MAFO90	Air intake module with G4 air filter
PAF	Intake and delivery plenum, not insulated, with spigot Ø 200 mm
PMA	Intake and delivery plenum, not insulated, with spigot Ø 200 mm
PMAC	Intake and delivery plenum, insulated, with spigot Ø 200 mm
R90	90° uninsulated air inlet/outlet connector
R90C	90° uninsulated air inlet/outlet connector
RD	Straight uninsulated air inlet/outlet connector
RDC	Straight insulated air inlet/outlet connector
Flexible ducts - caps	
TFA	Not insulated flexible ducts, Ø 200 mm (6 m lenght undivisible)
TFM	Insulated flexible ducts, Ø 200 mm (6 m lenght undivisible)
TP	Plastic cap Ø 200 mm
Air inlet and outlet plenum box	
CA	Air Inlet plenum box with double row grille
CAF	Air Inlet plenum box with double row grille 300 x 600 mm and filter G2
CM	Insulated air outlet plenum box with grille
Accessories	
VRC	Auxiliary water drip tray

5 RATED TECHNICAL DATA

» 2 pipes

DUCTIMAXi			13			14			23			24		
Speed			min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			2,5,7			2,5,7			1,5,7			1,5,7		
Control voltage	(E)	V	2,90	8,00	9,00	2,90	8,00	9,00	4,30	7,50	8,40	4,30	7,50	8,40
Rated air flow	(E)	m³/h	109	246	276	109	246	276	171	275	341	171	275	341
Available static pressure	(E)	Pa	10	50	63	10	50	63	19	50	77	19	50	77
Power input	(E)	W	6	25	33	6	25	33	10	24	39	10	24	39
Maximum current absorption		A	0,32			0,32			0,60			0,60		
Total cooling capacity	(1)(E)	kW	0,93	1,76	1,95	0,96	1,95	2,16	1,29	1,95	2,34	1,38	2,16	2,60
Sensible cooling capacity	(1)(E)	kW	0,62	1,25	1,39	0,64	1,34	1,48	0,91	1,39	1,66	0,95	1,49	1,79
FCEER class	(E)		A											
Water flow	(2)	l/h	161	306	340	167	337	375	222	339	408	239	374	453
Water pressure drop	(2)(E)	kPa	2	5	6	2	7	8	3	6	8	4	8	12
Heating capacity	(3)(E)	kW	0,88	1,81	1,99	0,91	1,98	2,21	1,33	1,98	2,35	1,40	2,20	2,68
FCCOP class	(E)		A											
Water flow	(3)	l/h	153	315	346	158	345	384	231	345	408	244	382	466
Water pressure drop	(3)(E)	kPa	1	4	5	2	6	7	2	5	7	3	7	10
Standard coil - number of rows			3			4			3			4		
Total sound power level	(4)	dB(A)	28	49	52	28	49	52	39	50	54	39	50	54
Inlet + radiated sound power level	(4)(E)	dB(A)	26	47	50	26	47	50	37	48	52	37	48	52
Outlet sound power level	(4)(E)	dB(A)	25	46	49	25	46	49	36	45	51	36	45	51
Water content - standard coil		dm³	1,20			1,60			1,20			1,60		
Cross-section area of power cables	(5)	mm²	1,00			1,00			1,00			1,00		
Power supply cable type			N07V-K											
Safety fuse F		A	1			1			1			1		
Fuses type			gG											

DUCTIMAXi			33			34			43			44		
Speed			min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			1,6,7			1,6,7			1,4,7			1,4,7		
Control voltage	(E)	V	4,50	7,40	8,30	4,50	7,40	8,30	5,40	8,30	9,90	5,40	8,30	9,90
Rated air flow	(E)	m³/h	195	360	402	195	360	402	305	532	652	305	532	652
Available static pressure	(E)	Pa	19	50	63	19	50	63	17	50	75	17	50	75
Power input	(E)	W	10	26	35	10	26	35	22	51	77	22	51	77
Maximum current absorption		A	0,84			0,84			0,84			0,84		
Total cooling capacity	(1)(E)	kW	1,46	2,33	2,59	1,59	2,74	3,04	1,98	3,26	3,79	2,35	3,87	4,56
Sensible cooling capacity	(1)(E)	kW	1,03	1,74	1,94	1,09	1,91	2,11	1,48	2,48	2,92	1,63	2,70	3,19
FCEER class	(E)		A											
Water flow	(2)	l/h	252	406	449	274	476	527	343	568	664	407	673	798
Water pressure drop	(2)(E)	kPa	2	5	5	3	7	9	3	8	11	6	14	18
Heating capacity	(3)(E)	kW	1,57	2,70	2,96	1,59	2,80	3,10	2,35	3,71	4,31	2,41	3,95	4,68
FCCOP class	(E)		A											
Water flow	(3)	l/h	272	470	515	276	488	538	408	644	749	419	687	814
Water pressure drop	(3)(E)	kPa	2	5	6	2	6	8	4	9	11	5	12	16
Standard coil - number of rows			3			4			3			4		
Total sound power level	(4)	dB(A)	39	50	54	39	50	54	38	52	58	38	52	58
Inlet + radiated sound power level	(4)(E)	dB(A)	37	48	52	37	48	52	36	50	56	36	50	56
Outlet sound power level	(4)(E)	dB(A)	36	47	51	36	47	51	35	49	55	35	49	55
Water content - standard coil		dm³	1,60			2,20			1,60			2,20		
Cross-section area of power cables	(5)	mm²	1,00			1,00			1,00			1,00		
Power supply cable type			N07V-K											
Safety fuse F		A	1			1			1			1		
Fuses type			gG											

DUCTIMAX i			53			54			63			64		
Speed			min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			1,6,7			1,6,7			5,6,7			5,6,7		
Control voltage	(E)	V	3,40	7,60	8,50	3,40	7,60	8,50	6,80	7,50	8,30	6,80	7,50	8,30
Rated air flow	(E)	m³/h	333	687	760	333	687	760	1050	1163	1289	1050	1163	1289
Available static pressure	(E)	Pa	12	50	61	12	50	61	40	50	60	40	50	60
Power input	(E)	W	11	54	68	11	54	68	105	128	162	105	128	162
Maximum current absorption		A	0,91			0,91			3,52			3,52		
Total cooling capacity	(1)(E)	kW	2,29	4,34	4,75	2,51	4,91	5,35	6,28	6,81	7,38	7,04	7,64	8,28
Sensible cooling capacity	(1)(E)	kW	1,67	3,21	3,51	1,77	3,45	3,76	4,64	5,03	5,46	4,96	5,38	5,84
FCEER class	(E)		A			A			C			B		
Water flow	(2)	l/h	394	753	828	432	850	930	1094	1190	1295	1225	1332	1448
Water pressure drop	(2)(E)	kPa	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity	(3)(E)	kW	2,54	4,76	5,17	2,63	5,03	5,49	6,68	7,22	7,80	7,18	7,80	8,46
FCCOP class	(E)		A			A			B			B		
Water flow	(3)	l/h	441	827	898	457	875	955	1162	1256	1356	1248	1355	1471
Water pressure drop	(3)(E)	kPa	2	7	8	3	9	11	12	14	16	17	19	22
Standard coil - number of rows			3			4			3			4		
Total sound power level	(4)	dB(A)	38	55	58	38	55	58	61	63	69	61	63	69
Inlet + radiated sound power level	(4)(E)	dB(A)	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level	(4)(E)	dB(A)	35	52	55	35	52	55	58	60	66	58	60	66
Water content - standard coil		dm³	2,50			3,30			2,50			3,30		
Cross-section area of power cables	(5)	mm²	1,00			1,00			1,50			1,50		
Power supply cable type			N07V-K											
Safety fuse F		A	1			1			2			2		
Fuses type			gG											

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2015

(2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity)

(3) Water temperature 45°C / 40°C, air temperature 20°C

(4) Sound power measured according to standards ISO 3741 and ISO 3742

(5) The shown section is to be considered as the minimum recommended section. The cables must be chosen in compliance with CEI - UNEL 35024/1. standard.

(E) EUROVENT certified data

Power supply 230-1-50 (V-ph-Hz)

» 4 pipes

DUCTIMAX i			13			14			23			24		
Speed			min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			2,5,7			2,5,7			1,5,7			1,5,7		
Control voltage DF 1R	(E)	V	2,90	7,90	8,90	2,90	7,90	8,90	4,50	7,30	8,90	4,50	7,30	8,90
Rated air flow DF 1R	(E)	m³/h	109	243	270	109	243	270	170	272	336	170	272	336
Available static pressure DF 1R	(E)	Pa	10	50	63	10	50	63	19	50	77	19	50	77
Power input DF 1R	(E)	W	6	25	32	6	25	32	10	23	39	10	23	39
Maximum current absorption		A	0,32			0,32			0,60			0,60		
Total cooling capacity DF 1R	(1)(E)	kW	0,93	1,74	1,91	0,96	1,93	2,11	1,28	1,93	2,31	1,37	2,14	2,56
Sensible cooling capacity DF 1R	(1)(E)	kW	0,62	1,24	1,36	0,64	1,32	1,45	0,90	1,38	1,64	0,94	1,47	1,77
FCEER class DF 1R	(E)		A											
Water flow DF 1R	(2)	l/h	161	302	333	167	334	368	221	335	404	238	370	447
Water pressure drop DF 1R	(2)(E)	kPa	2	5	6	2	7	8	3	6	8	4	8	12
Heating capacity DF 1R	(3)(E)	kW	1,14	1,93	2,06	1,14	1,93	2,06	1,55	2,07	2,32	1,55	2,07	2,32
FCCOP class DF 1R	(E)		A											
Water flow DF 1R	(3)	l/h	100	169	180	100	169	180	136	181	204	136	181	204
Water pressure drop DF 1R	(3)(E)	kPa	1	2	3	1	2	3	2	3	3	2	3	3
Total sound power level DF 1R	(4)	dB(A)	28	49	52	28	49	52	39	50	54	39	50	54
Additional coil DF - number of rows			3+1			4+1			3+1			4+1		
Inlet + radiated sound power level DF 1R	(4)(E)	dB(A)	26	47	50	26	47	50	37	46	52	37	46	52
Outlet sound power level DF 1R	(4)(E)	dB(A)	25	46	49	25	46	49	36	45	51	36	45	51
Water content - additional coil DF 1R		dm³	0,47			0,47			0,47			0,47		
Cross-section area of power cables	(5)	mm²	1,00			1,00			1,00			1,00		
Power supply cable type			N07V-K											
Safety fuse F		A	1			1			1			1		
Fuses type			gG											

DUCTIMAXi			33			34			43			44		
Speed			min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			1,6,7			1,6,7			1,4,7			1,4,7		
Control voltage DF 1R	(E)	V	4,50	7,40	8,30	4,50	7,40	8,30	5,40	8,30	9,90	5,40	8,30	9,90
Rated air flow DF 1R	(E)	m³/h	195	357	398	195	357	398	302	524	642	302	524	642
Available static pressure DF 1R	(E)	Pa	19	50	63	19	50	63	17	50	75	17	50	75
Power input DF 1R	(E)	W	10	26	35	10	26	35	21	50	77	21	50	77
Maximum current absorption		A	0,84			0,84			0,84			0,84		
Total cooling capacity DF 1R	(1)(E)	kW	1,46	2,31	2,56	1,59	2,72	3,01	1,95	3,22	3,75	2,33	3,82	4,51
Sensible cooling capacity DF 1R	(1)(E)	kW	1,03	1,73	1,92	1,09	1,89	2,09	1,47	2,44	2,89	1,62	2,66	3,15
FCEER class DF 1R	(E)		A											
Water flow DF 1R	(2)	l/h	252	402	445	274	473	522	339	562	656	403	664	788
Water pressure drop DF 1R	(2)(E)	kPa	2	5	5	3	7	9	3	8	11	6	13	18
Heating capacity DF 1R	(3)(E)	kW	2,09	3,09	3,29	2,09	3,09	3,29	2,80	3,82	4,24	2,80	3,82	4,24
FCCOP class DF 1R	(E)		A											
Water flow DF 1R	(3)	l/h	183	271	288	183	271	288	245	334	371	245	334	371
Water pressure drop DF 1R	(3)(E)	kPa	2	3	4	2	3	4	3	5	6	3	5	6
Total sound power level DF 1R	(4)	dB(A)	39	50	54	39	50	54	38	52	58	38	52	58
Additional coil DF - number of rows			3+1			4+1			3+1			4+1		
Inlet + radiated sound power level DF 1R	(4)(E)	dB(A)	37	48	52	37	48	52	36	50	56	36	50	56
Outlet sound power level DF 1R	(4)(E)	dB(A)	36	47	51	36	47	51	35	49	55	35	49	55
Water content - additional coil DF 1R		dm³	0,59			0,59			0,59			0,59		
Cross-section area of power cables	(5)	mm²	1,00			1,00			1,00			1,00		
Power supply cable type			N07V-K											
Safety fuse F		A	1			1			1			1		
Fuses type			gG											

DUCTIMAXi			53			54			63			64		
Speed			min	med	max	min	med	max	min	med	max	min	med	max
Declared speed			1,6,7			1,6,7			5,6,7			5,6,7		
Control voltage DF 1R	(E)	V	3,40	7,60	8,50	3,40	7,60	8,50	6,80	7,50	8,30	6,80	7,50	8,30
Rated air flow DF 1R	(E)	m³/h	333	683	755	333	683	755	1050	1163	1289	1050	1163	1289
Available static pressure DF 1R	(E)	Pa	12	50	61	12	50	61	40	50	60	40	50	60
Power input DF 1R	(E)	W	11	54	67	11	54	67	105	128	162	105	128	162
Maximum current absorption		A	0,91			0,91			3,52			3,52		
Total cooling capacity DF 1R	(1)(E)	kW	2,29	4,32	4,72	2,51	4,88	5,32	6,28	6,81	7,38	7,04	7,64	8,28
Sensible cooling capacity DF 1R	(1)(E)	kW	1,67	3,19	3,48	1,77	3,43	3,74	4,64	5,03	5,46	4,96	5,38	5,84
FCEER class DF 1R	(E)		A			A			C			B		
Water flow DF 1R	(2)	l/h	394	749	822	432	846	925	1094	1190	1295	1225	1332	1448
Water pressure drop DF 1R	(2)(E)	kPa	2	7	8	3	10	12	13	16	18	20	23	26
Heating capacity DF 1R	(3)(E)	kW	3,40	5,17	5,45	3,40	5,17	5,45	6,42	6,73	7,06	6,42	6,73	7,06
FCCOP class DF 1R	(E)		A			A			C			C		
Water flow DF 1R	(3)	l/h	297	452	477	297	452	477	562	589	618	562	589	618
Water pressure drop DF 1R	(3)(E)	kPa	6	13	14	6	13	14	19	21	22	19	21	22
Total sound power level DF 1R	(4)	dB(A)	38	55	58	38	55	58	61	63	69	61	63	69
Additional coil DF - number of rows			3+1			4+1			3+1			4+1		
Inlet + radiated sound power level DF 1R	(4)(E)	dB(A)	36	53	56	36	53	56	59	61	67	59	61	67
Outlet sound power level DF 1R	(4)(E)	dB(A)	35	52	55	35	52	55	58	60	66	58	60	66
Water content - additional coil DF 1R		dm³	0,97			0,97			0,97			0,97		
Cross-section area of power cables	(5)	mm²	1,00			1,00			1,50			1,50		
Power supply cable type			N07V-K											
Safety fuse F		A	1			1			2			2		
Fuses type			gG											

(1) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity) according to EN1397:2015

(2) Water temperature 7°C / 12°C, air temperature dry bulb 27°C, wet bulb 19°C (47% relative humidity)

(3) Water temperature 65°C / 55°C, air temperature 20°C

(4) Sound power measured according to standards ISO 3741 and ISO 3742

(5) The shown section is to be considered as the minimum recommended section. The cables must be chosen in compliance with CEI - UNEL 35024/1. standard.

(E) EUROVENT certified data

Power supply 230-1-50 (V-ph-Hz)

6 WEIGHTS

DUCTIMAX i		13	14	23	24	33	34	43	44	53	54	63	64
Weight - DF 1R version	kg	25,8	25,8	26,8	26,8	34,6	34,6	37,6	37,6	47,5	47,5	53,5	53,5
Weight - standard version	kg	24,4	24,4	25,4	25,4	33,0	33,0	36,0	36,0	45,0	45,0	51,0	51,0

7 PERFORMANCES


Galletti has developed on its www.galletti.com web-area the new ON-LINE integrated platform for product selection, configuration and the making of the economic offer.

The software, whose use is easy and intuitive, allows the identification of the desired products by calculating their performances based on real working conditions and their configuration helping the user in choosing options and accessories. It also allows to obtain a detailed report which includes performances, dimensional drawings, tender specifications and the economic offer.



Product selection:

Filters to make the identification of the requested product easier
 Performance calculation and saving of results
 Performance comparison between products belonging to different series

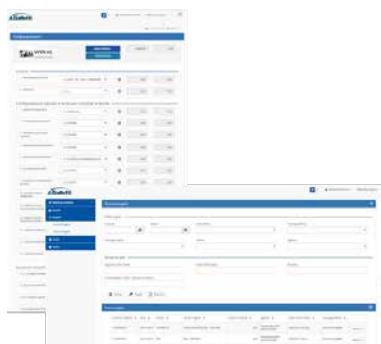

Configuration and project history

Wizard configuration of accessories and options for chillers, heat pumps and hydronic units
 Creation of a project which collects all products of interest
 Complete management of the stored history projects



Report:

Generation of a detailed list report in pdf format
 Choice of the sections to be included in the print:
 — Products performances
 — Dimensional drawings
 — Tender specifications

8 VENTILATION FEATURES

The pressure drops shown below refer to accessories that are not at all affected by the various sizes of the thermal ventilating units.

Pressure drops refer to the accessory itself and are not related to the size of the thermal ventilating units.

CM - CA - CAF	DPA (Pa)	QA m ³ /h																			
		50	100	150	200	250	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700
CM1		0	1	3	5	8	12	20	31	44	59	-	-	-	-	-	-	-	-	-	
CM2		0	0	1	1	2	3	5	8	11	14	18	23	28	34	40	46	53	-	-	-
CM3		0	0	0	1	1	1	2	3	5	6	8	10	12	15	18	20	24	27	30	34
CA2		0	0	1	2	3	4	6	10	14	19	24	30	37	44	52	-	-	-	-	-
CA3		0	0	0	1	1	1	3	4	6	7	10	12	15	18	21	24	28	32	36	40
CAF2*		0	1	2	4	6	8	12	18	25	33	41	50	61	-	-	-	-	-	-	-
CAF3*		0	0	1	1	2	3	5	7	10	12	16	19	23	27	32	37	42	47	53	59

9 SOUND POWER LEVELS FOR 2-PIPES OCTAVE BAND

Model	Vr	Lw IN+R	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Lw OUT	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
		dB(A)	dB	dB	dB	dB	dB	dB	dB(A)	dB	dB	dB	dB	dB	dB	dB	
DM130i	7	50	51,5	48,7	48,6	45,5	40,6	31,2	21,3	49	51,0	51,6	45,7	44,4	38,6	31,2	21,1
	5	47	48,0	46,1	46,4	42,1	36,4	26,0	18,0	46	48,7	48,5	43,6	41,1	34,8	26,5	16,9
	2	26	32,6	32,0	22,8	13,6	7,10	7,40	11,5	25	28,7	28,6	25,2	15,0	6,90	2,60	5,80
DM140i	7	50	51,5	48,7	48,6	45,5	40,6	31,2	21,3	49	51,0	51,6	45,7	44,4	38,6	31,2	21,1
	5	47	48,0	46,1	46,4	42,1	36,4	26,0	18,0	46	48,7	48,5	43,6	41,1	34,8	26,5	16,9
	2	26	32,6	32,0	22,8	13,6	7,10	7,40	11,5	25	28,7	28,6	25,2	15,0	6,90	2,60	5,80
DM230i	7	52	53,5	50,7	50,6	47,5	42,6	33,2	23,3	51	53,0	53,6	47,7	46,4	40,6	33,2	23,1
	5	48	47,0	45,1	45,4	41,1	35,4	25,0	17,0	45	47,7	47,5	42,6	40,1	33,8	25,5	15,9
	1	37	43,6	43,0	33,8	24,6	18,1	18,4	22,5	36	39,7	39,6	36,2	26,0	17,9	13,6	16,8
DM240i	7	52	53,5	50,7	50,6	47,5	42,6	33,2	23,3	51	53,0	53,6	47,7	46,4	40,6	33,2	23,1
	5	48	47,0	45,1	45,4	41,1	35,4	25,0	17,0	45	47,7	47,5	42,6	40,1	33,8	25,5	15,9
	1	37	43,6	43,0	33,8	24,6	18,1	18,4	22,5	36	39,7	39,6	36,2	26,0	17,9	13,6	16,8
DM330i	7	52	53,5	50,7	50,6	47,5	42,6	33,2	23,3	51	53,0	53,6	47,7	46,4	40,6	33,2	23,1
	6	48	49,0	47,1	47,4	43,1	37,4	27,0	19,0	47	49,7	49,5	44,6	42,1	35,8	27,5	17,9
	1	37	43,6	43,0	33,8	24,6	18,1	18,4	22,5	36	39,7	39,6	36,2	26,0	17,9	13,6	16,8
DM340i	7	52	53,5	50,7	50,6	47,5	42,6	33,2	23,3	51	53,0	53,6	47,7	46,4	40,6	33,2	23,1
	6	48	49,0	47,1	47,4	43,1	37,4	27,0	19,0	47	49,7	49,5	44,6	42,1	35,8	27,5	17,9
	1	37	43,6	43,0	33,8	24,6	18,1	18,4	22,5	36	39,7	39,6	36,2	26,0	17,9	13,6	16,8
DM430i	7	56	57,5	54,7	54,6	51,5	46,6	37,2	27,3	55	57,0	57,6	51,7	50,4	44,6	37,2	27,1
	4	50	51,0	49,1	49,4	45,1	39,4	29,0	21,0	49	51,7	51,5	46,6	44,1	37,8	29,5	19,9
	1	36	42,6	42,0	32,8	23,6	17,1	17,4	21,5	35	38,7	38,6	35,2	25,0	16,9	12,6	15,8
DM440i	7	56	57,5	54,7	54,6	51,5	46,6	37,2	27,3	55	57,0	57,6	51,7	50,4	44,6	37,2	27,1
	4	50	51,0	49,1	49,4	45,1	39,4	29,0	21,0	49	51,7	51,5	46,6	44,1	37,8	29,5	19,9
	1	36	42,6	42,0	32,8	23,6	17,1	17,4	21,5	35	38,7	38,6	35,2	25,0	16,9	12,6	15,8
DM530i	7	56	57,5	54,7	54,6	51,5	46,6	37,2	27,3	55	57,0	57,6	51,7	50,4	44,6	37,2	27,1
	6	53	54,0	52,1	52,4	48,1	42,4	32,0	24,0	52	54,7	54,5	49,6	47,1	40,8	32,5	22,9
	1	36	42,6	42,0	32,8	23,6	17,1	17,4	21,5	35	38,7	38,6	35,2	25,0	16,9	12,6	15,8
DM540i	7	56	57,5	54,7	54,6	51,5	46,6	37,2	27,3	55	57,0	57,6	51,7	50,4	44,6	37,2	27,1
	6	53	54,0	52,1	52,4	48,1	42,4	32,0	24,0	52	54,7	54,5	49,6	47,1	40,8	32,5	22,9
	1	36	42,6	42,0	32,8	23,6	17,1	17,4	21,5	35	38,7	38,6	35,2	25,0	16,9	12,6	15,8
DM630i	7	67	71,2	68,9	65,2	60,8	57,2	51,2	42,5	66	70,2	67,9	64,2	59,8	56,2	50,2	31,5
	6	61	65,2	62,9	59,2	54,8	51,2	45,2	36,5	60	64,2	61,9	58,2	53,8	50,2	44,2	35,5
	5	59	63,2	60,9	57,2	52,8	49,2	43,2	34,5	58	62,1	59,8	56,1	51,7	48,1	42,1	34,4
DM640i	7	67	71,2	68,9	65,2	60,8	57,2	51,2	42,5	66	70,2	67,9	64,2	59,8	56,2	50,2	31,5
	6	61	65,2	62,9	59,2	54,8	51,2	45,2	36,5	60	64,2	61,9	58,2	53,8	50,2	44,2	35,5
	5	59	63,2	60,9	57,2	52,8	49,2	43,2	34,5	58	62,1	59,8	56,1	51,7	48,1	42,1	34,4

Data referring to filter G3 units at PU = 0 Pa - For all operating points and work limits not present in the upper table, refer to the Galletti S.p.A. selection program

LW_out: Octave sound power level - outlet

LW_In + R: Octave sound power level - inlet + radiated

LWA: A-weighted sound power

Vr: Declared fan speed

10 SOUND POWER LEVELS FOR OCTAVE BAND 4 PIPE SYSTEMS AND 1 ROW

Model	Vr	Lw IN+R	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Lw OUT	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
		dB(A)	dB	dB	dB	dB	dB	dB	dB(A)	dB	dB	dB	dB	dB	dB	dB	
DM130i	7	50	51,5	48,7	48,6	45,5	40,6	31,2	21,3	49	51,0	51,6	45,7	44,4	38,6	31,2	21,1
	5	47	48,0	46,1	46,4	42,1	36,4	26,0	18,0	46	48,7	48,5	43,6	41,1	34,8	26,5	16,9
	2	26	32,6	32,0	22,8	13,6	7,10	7,40	11,5	25	28,7	28,6	25,2	15,0	6,90	2,60	5,80
DM140i	7	50	51,5	48,7	48,6	45,5	40,6	31,2	21,3	49	51,0	51,6	45,7	44,4	38,6	31,2	21,1
	5	47	48,0	46,1	46,4	42,1	36,4	26,0	18,0	46	48,7	48,5	43,6	41,1	34,8	26,5	16,9
	2	26	32,6	32,0	22,8	13,6	7,10	7,40	11,5	25	28,7	28,6	25,2	15,0	6,90	2,60	5,80
DM230i	7	52	53,5	50,7	50,6	47,5	42,6	33,2	23,3	51	53,0	53,6	47,7	46,4	40,6	33,2	23,1
	5	46	47,0	45,1	45,4	41,1	35,4	25,0	17,0	45	47,7	47,5	42,6	40,1	33,8	25,5	15,9
	1	37	43,6	43,0	33,8	24,6	18,1	18,4	22,5	36	39,7	39,6	36,2	26,0	17,9	13,6	16,8
DM240i	7	52	53,5	50,7	50,6	47,5	42,6	33,2	23,3	51	53,0	53,6	47,7	46,4	40,6	33,2	23,1
	5	46	47,0	45,1	45,4	41,1	35,4	25,0	17,0	45	47,7	47,5	42,6	40,1	33,8	25,5	15,9
	1	37	43,6	43,0	33,8	24,6	18,1	18,4	22,5	36	39,7	39,6	36,2	26,0	17,9	13,6	16,8
DM330i	7	52	53,5	50,7	50,6	47,5	42,6	33,2	23,3	51	53,0	53,6	47,7	46,4	40,6	33,2	23,1
	6	48	49,0	47,1	47,4	43,1	37,4	27,0	19,0	47	49,7	49,5	44,6	42,1	35,8	27,5	17,9
	1	37	43,6	43,0	33,8	24,6	18,1	18,4	22,5	36	39,7	39,6	36,2	26,0	17,9	13,6	16,8
DM340i	7	52	53,5	50,7	50,6	47,5	42,6	33,2	23,3	51	53,0	53,6	47,7	46,4	40,6	33,2	23,1
	6	48	49,0	47,1	47,4	43,1	37,4	27,0	19,0	47	49,7	49,5	44,6	42,1	35,8	27,5	17,9
	1	37	43,6	43,0	33,8	24,6	18,1	18,4	22,5	36	39,7	39,6	36,2	26,0	17,9	13,6	16,8
DM430i	7	56	57,5	54,7	54,6	51,5	46,6	37,2	27,3	55	57,0	57,6	51,7	50,4	44,6	37,2	27,1
	4	50	51,0	49,1	49,4	45,1	39,4	29,0	21,0	49	51,7	51,5	46,6	44,1	37,8	29,5	19,9
	1	36	42,6	42,0	32,8	23,6	17,1	17,4	21,5	35	38,7	38,6	35,2	25,0	16,9	12,6	15,8
DM440i	7	56	57,5	54,7	54,6	51,5	46,6	37,2	27,3	55	57,0	57,6	51,7	50,4	44,6	37,2	27,1
	4	50	51,0	49,1	49,4	45,1	39,4	29,0	21,0	49	51,7	51,5	46,6	44,1	37,8	29,5	19,9
	1	36	42,6	42,0	32,8	23,6	17,1	17,4	21,5	35	38,7	38,6	35,2	25,0	16,9	12,6	15,8
DM530i	7	56	57,5	54,7	54,6	51,5	46,6	37,2	27,3	55	57,0	57,6	51,7	50,4	44,6	37,2	27,1
	6	53	54,0	52,1	52,4	48,1	42,4	32,0	24,0	52	54,7	54,5	49,6	47,1	40,8	32,5	22,9
	1	36	42,6	42,0	32,8	23,6	17,1	17,4	21,5	35	38,7	38,6	35,2	25,0	16,9	12,6	15,8
DM540i	7	56	57,5	54,7	54,6	51,5	46,6	37,2	27,3	55	57,0	57,6	51,7	50,4	44,6	37,2	27,1
	6	53	54,0	52,1	52,4	48,1	42,4	32,0	24,0	52	54,7	54,5	49,6	47,1	40,8	32,5	22,9
	1	36	42,6	42,0	32,8	23,6	17,1	17,4	21,5	35	38,7	38,6	35,2	25,0	16,9	12,6	15,8
DM630i	7	67	71,2	68,9	65,2	60,8	57,2	51,2	42,5	66	70,2	67,9	64,2	59,8	56,2	50,2	31,5
	6	61	65,2	62,9	59,2	54,8	51,2	45,2	36,5	60	64,2	61,9	58,2	53,8	50,2	44,2	35,5
	5	59	63,2	60,9	57,2	52,8	49,2	43,2	34,5	58	62,1	59,8	56,1	51,7	48,1	42,1	34,4
DM640i	7	67	71,2	68,9	65,2	60,8	57,2	51,2	42,5	66	70,2	67,9	64,2	59,8	56,2	50,2	31,5
	6	61	65,2	62,9	59,2	54,8	51,2	45,2	36,5	60	64,2	61,9	58,2	53,8	50,2	44,2	35,5
	5	59	63,2	60,9	57,2	52,8	49,2	43,2	34,5	58	62,1	59,8	56,1	51,7	48,1	42,1	34,4

Data referring to filter G3 units at PU = 0 Pa - For all operating points and work limits not present in the upper table, refer to the Galletti S.p.A. selection program

LW_out: Octave sound power level - outlet



LW_In + R: Octave sound power level - inlet + radiated

LWA:A-weighted sound power

Vr: Declared fan speed

11 OVERALL DIMENSIONS

» Ductimax 1 - 4


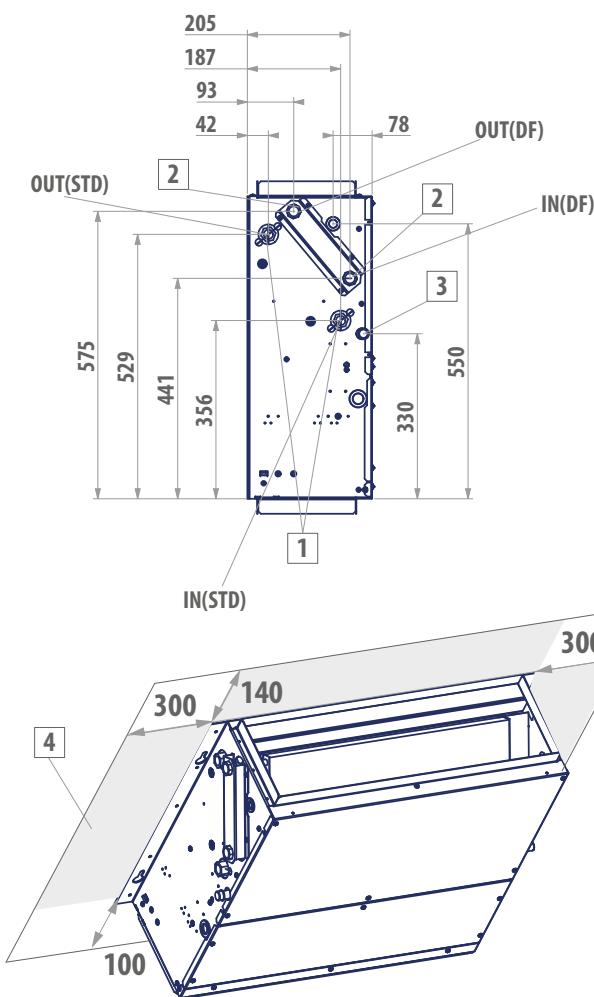
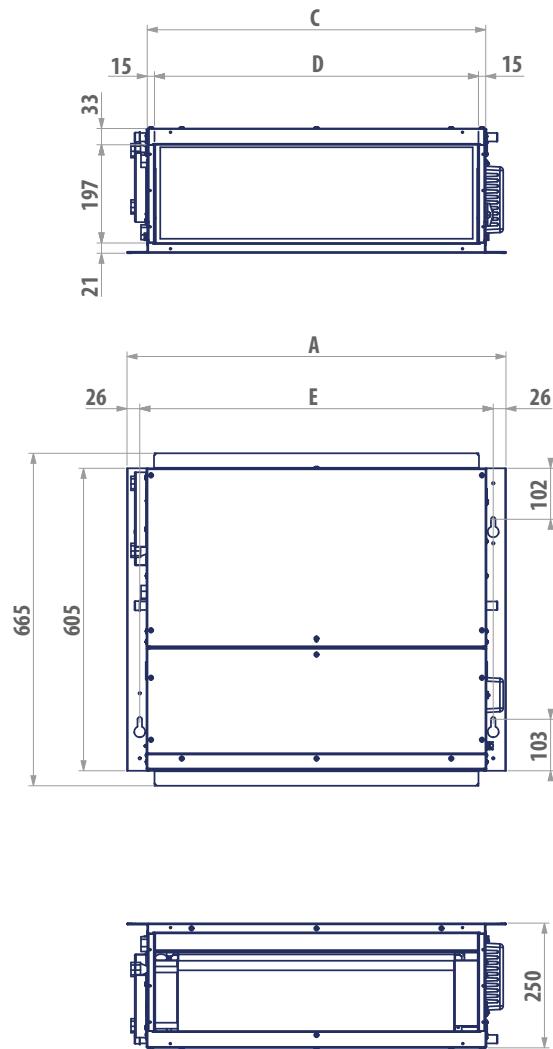


Legend

- 1** Water connections standard heat exchanger ø 1/2" female gas
 - 2** Water connections additional heat exchanger ø 1/2" female gas
 - 3** Condensate discharge
 - 4** Minimum installation distance

DUCTIMAX i		13	14	23	24	33	34	43	44
A	mm	758	758	758	758	968	968	968	968
C	mm	677	677	677	677	887	887	887	887
D	mm	648	648	648	648	858	858	858	858
E	mm	707	707	707	707	917	917	917	917

» Ductimax 5 - 6

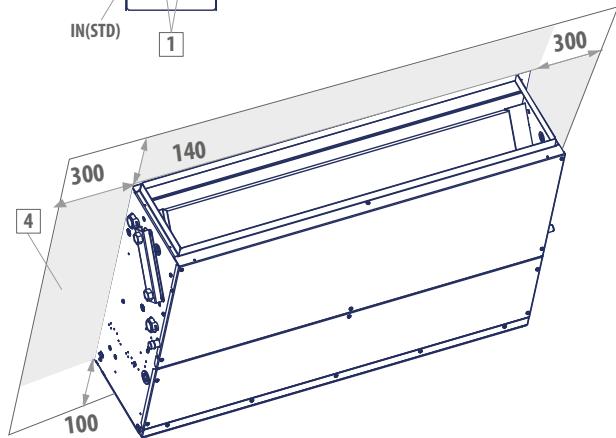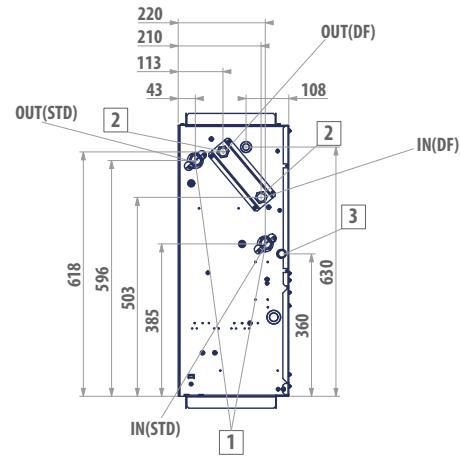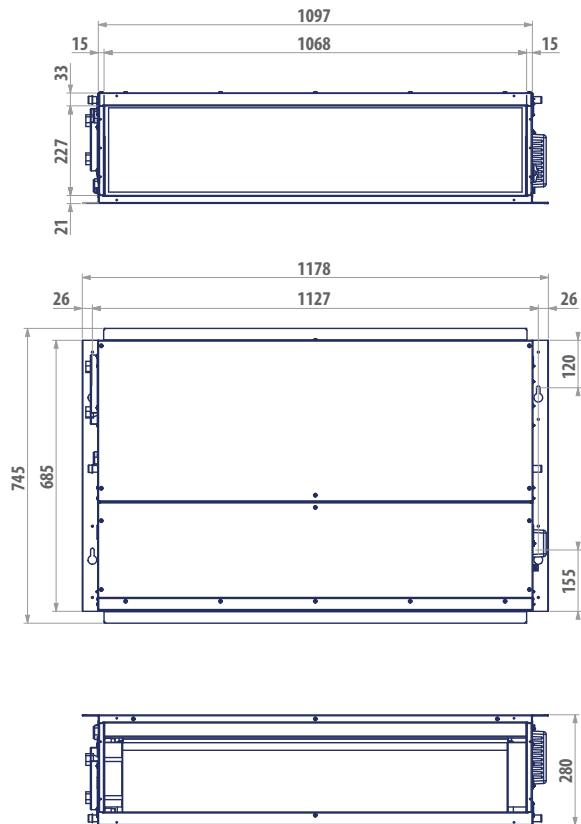

LEGEND

- 1** Standard heat exchanger water connections 3/4" gas female
- 2** Water connections additional heat exchanger 1/2" female gas
- 3** Condensate discharge
- 4** Minimum installation distance

12 ELECTRICAL CONNECTIONS

Make the electrical connections with the power supply disconnected, in accordance with current safety regulations.

All the wiring must be done by qualified personnel.

For each thermal ventilating unit provide a main circuit breaker (IL), with opening contacts separated by at least 3 mm and an adequate protection fuse (F).

Electrical intakes are shown on the rating labels on the units.

During installation, strictly abide by the indications on the wiring diagram for the unit-control panel combination.

DUCTIMAX i + MYCOMFORT LARGE (built-in)

DUCTIMAX i + MYCOMFORT LARGE (separate motor)

DUCTIMAX i + EVO

DUCTIMAX i + dip switch setting

NOTE: The electric wires (power and control circuits) must be pulled in through the gland on the side of the electric box where the plumbing connections are located and then connected to the terminals.

 **WARNING:** COMMON motor wire = WHITE, wrong connection may cause serious damages to the motor.


13 ELECTRICAL WIRES

Traced connection are on responsibility of the installer

WARNING:

COMMON Motor wire = WHITE Wrong connection may cause serious damages to the motor

» MCL wiring diagram with built-in inverter motor

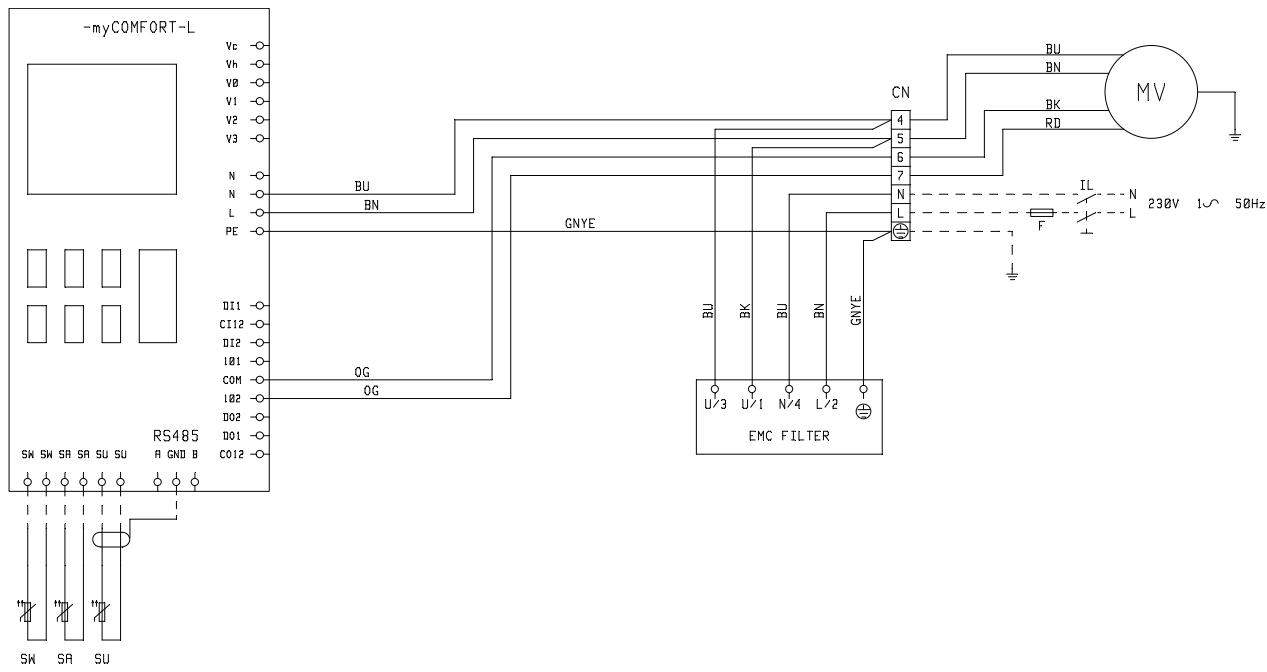

...Wirings made by supplier

L Phase

PE Ground

N Neutral

CN Terminal board connector

F Fuse (not provided)

IL Circuit breaker (not supplied)

BK Black = common inverter

BU Blue = neutral inverter motor

COM Common output for 0-10V outputs

BN Brown = inverter motor phase

GYNE Yellow/green = Ground (PE)

RD Red = 0-10V signal

SW Water probe

SU Humidity probe

SA Air probe

EMC FILTER noise filter

A/B/GND RS485


BN (L2 FILT) Brown = filter IN line

BN (N4 FILT) Blue = filter IN neutral


BK (U1 FILT) Black = filter OUT line

BU (U3 FILT) Blue = filter OUT neutral

» MCL wiring diagram with separated inverter motor

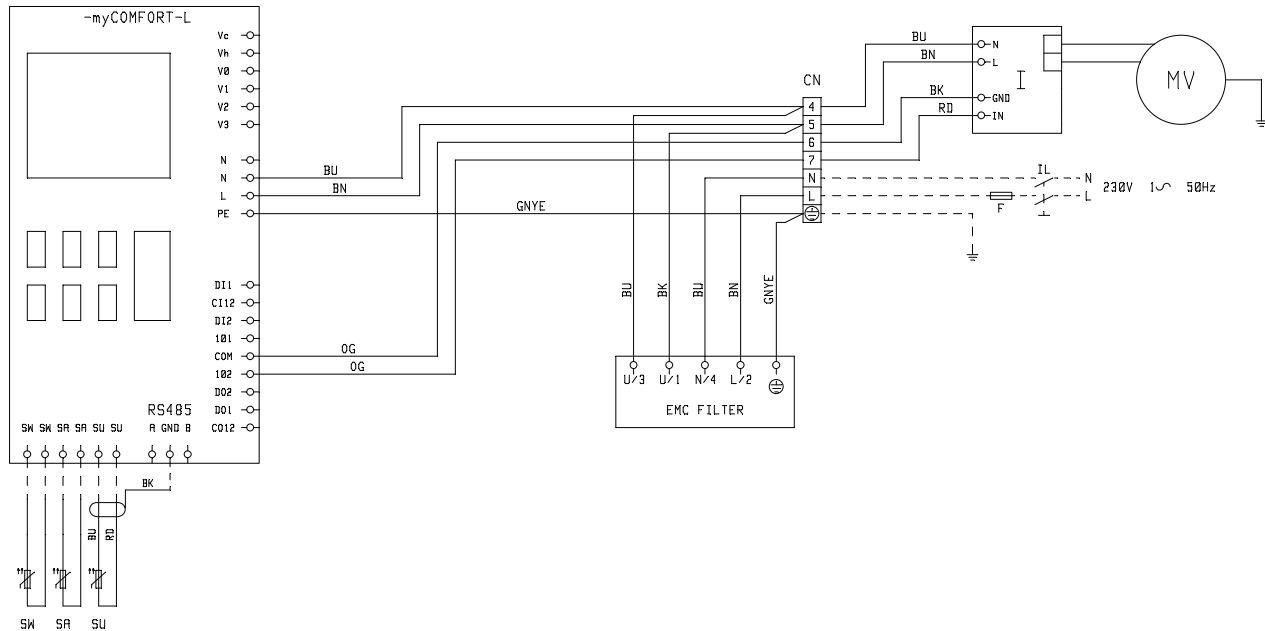
...Wirings made by supplier
L Phase
PE Ground
N Neutral
CN Terminal board connector
F Fuse (not provided)
ILCircuit breaker (not supplied)
BK Black = common inverter
BU Blue = neutral inverter motor
COM Common output for 0-10V outputs
BNBrown = inverter motor phase
GYNE Yellow/green = Ground (PE)
RD Red = 0-10V signal
SW Water probe
SU Humidity probe
SA Air probe
EMC FILTER noise filter
A/B/GND RS485
BN (L2 FILT) Brown = filter IN line
BN (N4 FILT) Blue = filter IN neutral
BK (U1 FILT) Black = filter OUT line
BU (U3 FILT) Blue = filter OUT neutral

» EVO EC motor wiring diagram

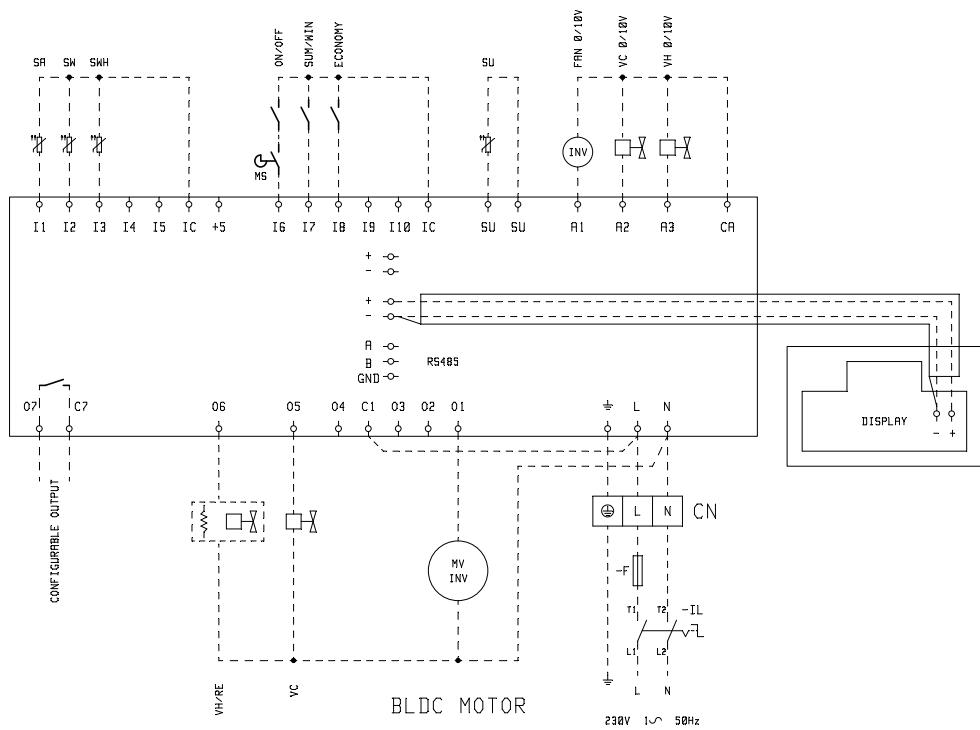

..... Wirings made by supplier
Vo Inverter motor power

L Phase

PE Ground

N Neutral

CN Terminal board connector

F Fuse (not provided)

IL Circuit breaker (not supplied)

WH White = common

BK Black = GND inverter

BU Blue = neutral inverter motor

VCCooling mode - solenoid valve
VH Heating mode - solenoid valve
COM Common output for 0-10V outputs
BNBrown = inverter motor phase
GYNE Yellow/green = Ground (PE)
RD Red = 0-10V signal
RE Electrical heating elements
SW Water probe
SU Humidity probe
SA Air probe
A/B/GND RS485

14 ACCESSORIES

E2TY - 2.8" touch screen user interface

Touch screen 2.8" user panel for EVO-2-TOUCH control EVO, frame in natural brushed aluminium. (to combined with EVO BOARD)

Main functions:

- 2.8" capacitive touch screen display
- Integrated temperature and humidity probe
- Low-voltage power supply drawn from the power component
- Wall mounted
- Designed for the main electrical connection boxes
- User-friendly
- Aluminium foil and polyethylene frame with various chrome plating options



E2TK - 2.8" touch screen user interface

Touch screen 2.8" user panel for EVO-2-TOUCH control EVO, frame in aluminium color black RAL9005. (to combined with EVO BOARD)

Main functions:

- 2.8" capacitive touch screen display
- Integrated temperature and humidity probe
- Low-voltage power supply drawn from the power component
- Wall mounted
- Designed for the main electrical connection boxes
- User-friendly
- Aluminium foil and polyethylene frame with various chrome plating options



MYCOMFORT LARGE - wall-mounted microprocessor control

having the following main features:

- Room air temperature reading and adjustment
- Room humidity reading and adjustment
- Water temperature reading (water probe as an optional)
- Manual and automatic adjustment of fan speed
- Manual and automatic switching of heating and cooling mode depending on the water temperature within the heat exchanger or on the room temperature, with a neutral zone that can be selected in the range from 2° to 5°C.
- Clock and hourly timer-programmed operation
- 2 Analogue outputs for controlling modulating devices -10V
- 2 Digital outputs for controlling (On/Off) external devices (no voltage contacts)
- Serial port for Bus connection

The controller is equipped with a large display (3") to show and set all the functions of the unit. Using the installation kit available, MYCOMFORT can be mounted on the unit.



DIST - MYCOMFORT controller spacer for wall mounting

ABS wall mounting support to separate the MYCOMFORT controllers from the wall.



EVO - wall-mounted microprocessor split controller with display

EVO controller is a system composed of:

- Circuit board comprising the power circuit, the microprocessor system and the removable screw connectors for the connection of the inlet and outlet devices;
- User interface comprising a graphic display and a keyboard (six keys) provided with clock and sensor to read the ambient temperature.

Main functions:

- Room air temperature reading and adjustment
- Room humidity reading and adjustment
- Water temperature reading (water sensor as an optional)
- Manual/automatic regulation of the fan speed with ON-OFF step and modulating control
- Automatic adjustment of valve opening with ON/OFF and modulating controller
- Manual and automatic switching of heating and cooling mode depending on the water temperature within the heat exchanger or on the room temperature, with a selectable neutral zone
- Clock and hourly timer-programmed operation
- 3 Analogue outputs for controlling modulating devices -10V
- Economy function and minimum temperature
- 1 Digital outputs for controlling (On/Off) external devices (no voltage contacts)
- Serial port for RS485 connection
- Serial port for OC connection
- 3 digital inputs for ON-OFF, Economy, Operating mode remote setting

Operating mode

The controller is provided with a programmable display that allows you to view and set the hydronic unit functions by means of the specific interface with parameter description.



TED10 - on-board or wall-mounted electronic controller for EC fan control and one or two valves ON/OFF 230V.

Main functions:

- It supports terminal units equipped with EC electric motor thanks to its internal 0-10 V signal generator
- for 2 and 4 pipes systems
- Manual and automatic fan speed adjustment mode
- temperature-based management of water flow enabling







TED SWA - Water or air temperature sensor for controls TED

NTC resistive probe connected directly to the microprocessor control TED10, depending on connection, it measures indifferently the temperature of the water passing through the finned coil or the temperature of the air inlet to the fan coil.


Ventilation is disabled in heating and cooling operation mode if the detected temperature is less than 30 °C and above 22 °C respectively.




<p>MCSWE - water temperature sensor for microprocessor controls model EVO, MYCOMFORT Directly connected to the microprocessor controllers EVO and MYCOMFORT to measure the water temperature through the heat exchanger. If the temperature registered is lower than 17 °C the unit works in cooling mode and the temperature range of the control panel will be referred to the cooling mode (19/31 °C); if the temperature registered is higher than 37 °C the unit works in heating mode and the temperature range of the control panel will be referred to the heating mode (14/26 °C). If the temperature registered is between 17 °C e 37 °C the control panel will disable the unit operation.</p>	
<p>MCSUE - Humidity sensor for EVO and MYCOMFORT microprocessor controller Directly connected to the microprocessor controllers EVO and MYCOMFORT, it enables the control of the heating element ventilation (if present, as support in heating mode) and the automatic cooling/heating changeover according to the water temperature.</p>	
<p>PMA / PMAC - plenum for the connection to flexible ducts PMA e PMAC (insulated) plenums are used to connect to air distribution plants achieved by means of hoses or to other dedicated accessories. They can be installed on both the intake and delivery line (in this case the hose should be insulated). The spigot diameter is Ø 200 mm. DUCTIMAX 1-2: number of outlets 2 DUCTIMAX 3-4: number of outlets 3 DUCTIMAX 5-6: number of outlets 3</p>	
<p>PAF - Front air intake plenum Ø200 Thanks to the accessories "PMA outlet plenum" and "PAF front intake plenum" it is possible to include DM in installations where it is necessary to have the air outlet and inlet on a single side, thus considerably reducing the required space. The air intake is equipped with Ø 200 collars</p>	
<p>RD / RDC - Suction/delivery straight connection Are used to connect the unit DUCTIMAX i to rectangular air distribution ducts or directly to GM and GA air outlet and intake grilles</p>	
<p>R90/R90C - 90° connection for intake/ delivery Can be installed on both the air inlet and outlet (in the R90C internally insulated version), the 90° fittings can be installed directly on the units. DUCTIMAX i.</p>	
<p>MAFO - Air intake modules with filter Made of galvanized steel sheet, these modules permit to filter the air sucked up by the unit and also to connect the unit to the intake channeling. MAFOD: air intake module with corrugated filter made of acrylic fiber, selfextinguishing in class 1, with filtering class G4. The filter may be inserted or removed and is fixed by means of 2 knobs with 4 MA threaded stems. The filtering material may be washed and regenerated to maintain the rated filtering efficiency with limited charge leaks. The accessory kit comprises • Load-bearing structure made of galvanized steel sheet. • Removable a bucket-type filter. • Self-tapping fixing screws.</p>	
<p>TFA - Not insulated flexible ducts Uninsulated flexible duct for the connections to the air distribution with Ø 200 mm diameter, supplied in 6 m lenght undivisible.</p>	
<p>TFM - Insulated flexible ducts Insulated flexible duct for the connections to the air distribution with Ø 200 mm diameter, supplied in 6 m lenght undivisible. The insulation of the duct is optained by means of fiberglass, thickness 25 mm with 16 kg/m³ density.</p>	
<p>TP- Plastic cap Plastic cap Ø 200 mm for the closing on the PCOF, of the air outlet not used.</p>	
<p>CA/CAF- air inlet plenum box Intake Plenum box in galvanised sheet metal complete with circular collars (Ø 200 mm) for the connection, by means of hoses and intake grids with fixed fins, to pocket type structures, to increase the free air flow cross section. Sized to be adaptable to the modular structure of the ceiling panels, they are equipped with 2 or 3 circular collars so that they can be connected, following their suitable combination, to all the DUCTIMAX i units. The CA version is equipped with just the grid alone whereas the CAF version is also equipped with a flat filter in acrylic material, with filtering rating G2, housed in the standard frame. The filter of this second type of intake box can be serviced (cleaned) on a periodic basis without having to access the unit fitted behind the ceiling panels or in a service room.</p>	

CM - Delivery plenum boxes


Delivery Plenum boxes in galvanised sheet metal complete with circular collars (\varnothing 200 mm, for the connection by means of hoses) and adjustable delivery grids. The boxes are duly insulated externally with calorized foam polyethylene in order to prevent the formation of condensate during the cooling cycle. Sized to be adaptable to the modular structure of the ceiling panels, they are equipped with 1, 2 or 3 circular collars so that they can be connected, following their suitable combination, to all the heater fans of the DUCTIMAX i range. All versions are equipped with adjustable fins to optimise the distribution of the conditioned air.


GM - Aluminium air outlet grille


Anodized aluminium air intake grille with 2-row swinging fins, complete with galvanized sheet steel frame for mounting on the wall or directly on the air outlet of the unit. The galvanized steel sheet frame has slots, at one end, for direct mounting on the air outlet of the thermal ventilating unit.


GA - Aluminium air inlet grille


Air intake grids with single row of fins in anodised aluminium, equipped with galvanised sheet metal frame that is used to wall-mount the grids or to fit them directly on the intake head of the machine. The galvanised sheet metal frame is drilled at one end so that it can be secured directly to the intake head of the unit complete with RD connection.


VKM- 3-way motor-driven modulating valve complete with hydraulic kit


It controls the room temperature by stopping the water flow through the heat exchanger. The kit, available for all models with standard heat exchanger or additional DF heat exchanger, comprises the following components: Valve body: 3-way with incorporated by-pass (4 connections), 24V electro-thermal normally closed modulating servo control. It acts directly on the valve shutter. Hydraulic plumbing kit made with copper piping and brass connectors.


KVM - 2-way motor-driven modulating valve complete with hydraulic kit

It controls the room temperature by stopping the water flow through the heat exchanger. With 24V electro-thermal actuator. Available for all models, with standard heat exchanger or additional DF heat exchanger.


VRC - Auxiliary trays for collecting condensate

Used for collecting any condensate that might form on the adjusting valves, the hydraulic unions and the holdfasts during the cooling operating mode. The trays are made of galvanized metal sheet, with condensate discharge pipe (\varnothing 17 mm) setup for being connected to a flexible rubber tube, like that which has been envisaged for the condensate discharge trays of the basic unit. They are available for: DUCTIMAX i units installed horizontally, VRC.


RE - additional electric heating element

Useful as heating integration to the hot water system, the RE kit is made of an electric heater with safety thermostat (automatic and manual resetting) and power relay. The additional heating element should be coupled to the control panel. MYCOMFORT (the coupling to other controls is not allowed).


KSC - Condensate removal kit

This device allows to overcome displacements in the condensate drain. The pump can drain water up to 8 l/h and it is completed by a non return valve on the discharge side.



15 MAINTENANCE

For safety reasons, before carrying out any maintenance or cleaning jobs, turn off the unit by moving the fan speed selector to "Off" and putting off the main switch (0 position).

DANGER! Due caution must be taken while carrying out maintenance: some metal parts may cause injuries; wear protective gloves.

The maintenance requirements of DUCTIMAX ducted units are

limited to periodic cleaning of the air filter and heat exchanger and checks on the efficiency of condensate drainage.

Maintenance may be performed only by specialised personnel.

Whenever starting up the unit after it has not been used for a long time, check that there is no air in the heat exchanger. The motor requires no maintenance since it has self-lubricating bearings.


15.1 CLEANING THE AIR FILTER

Disconnect the unit from the power supply by setting the main switch on 0 (OFF).

To clean the air filter proceed as follows:

1. Access the unit via the inspection panel and take out the air filter as shown in (Air filter):

» Air filter

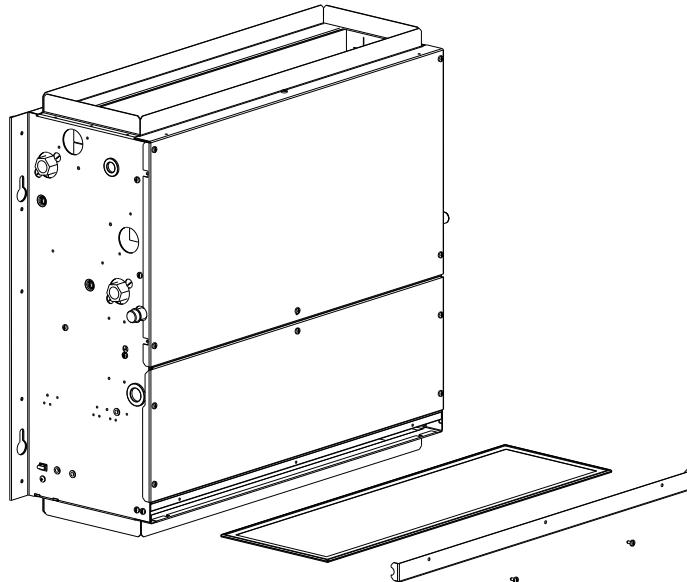

2. If the filter is on the inside of the intake grille, remove the latter and then proceed to carry out the steps described below.
3. Clean the filter with warm water or, in the event of dry dust build-up, using compressed air.
4. Allow the filter to dry and then fit it back in place.

15.2 CLEANING THE HEAT EXCHANGER


It is advisable to check the condition of the exchanger before the start of every summer season to make sure that the fins are not obstructed by dirt.

To access the heat exchanger, remove the outlet panel (whether of the type with collars or a rectangular flange) and the drip tray. On reaching the exchanger, clean it with compressed air or low-pressure steam taking care not to damage the fins.


Before the start of every summer season, check the efficiency of condensate drainage.

Adequate periodic maintenance will ensure save both energy and cost savings.

» MAFO - standard air intake

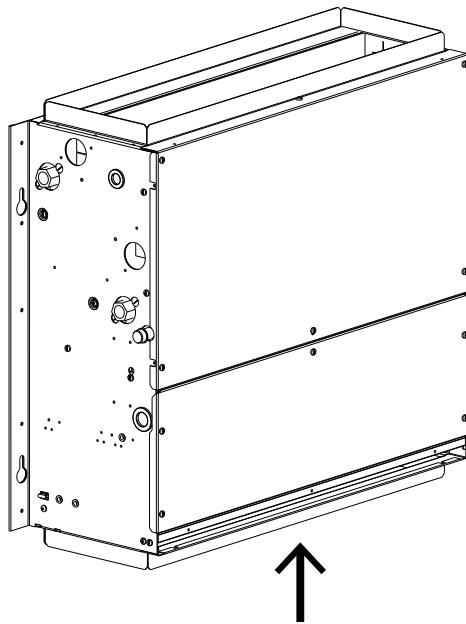

» Air intake MAF90-MAFO90

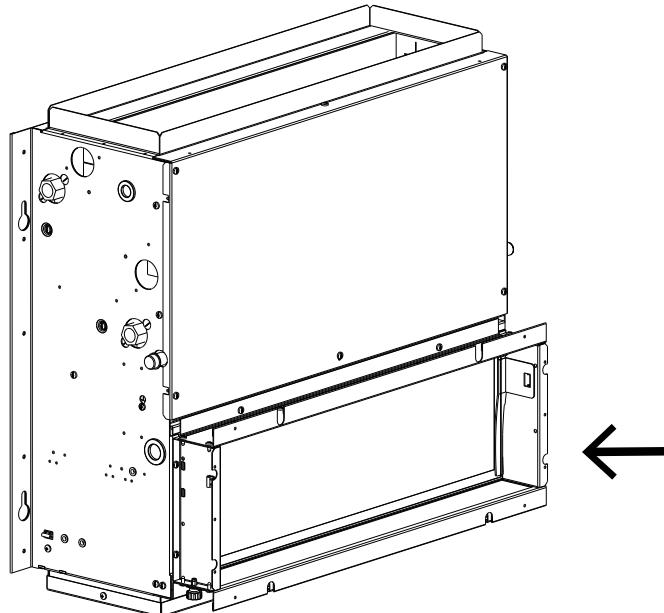



via Romagnoli 12/a
40010 Bentivoglio (BO) - Italy
Ph. +39 051/8908111
- Fax +039 051/8908122

www.galletti.com